

BSV-320AR-36

2MP Fixed Lens Small Bullet Camera And White LED

The rainbow camera series is equipped with super light-sensitive sensors that allow the camera to provide a color image throughout the day. When the ambient light is insufficient, the camera will turn on the integral lighting, allowing it to continue providing a full-color image. Featuring 4in1 technology, the camera is ideal for Plug & Play over existing analog infrastructure. With its outstanding performance, reliability, and affordable price, the BSV-320AR-36 camera is the perfect solution for basic installations.



2
MP


MAIN FEATURES

- BSV-320AR-36 2MP Fixed Lens Small Bullet Camera And White LED
- Sensor: 1/2.8" 5MP CMOS Sensor
- Selectable Output: 2MP: 1920×1080 AHD/TVI/CVI CVBS: 700TVL
- Lens: 3.6mm Mega-Pixel Fixed (85°)
- 24/7 Full-Color Day Mode
- 2D-DNR
- Digital WDR/HLC/BLC
- Illumination: 20m (2 High-Power White LED)
- IP67
- Weight: ~480g
- Power: DC12V/300mA




<https://provision-isr.com>

SPECIFICATIONS

| Video | |
|-------------------------------|---|
| Image Sensor | 1/2.8" 5MP CMOS Sensor |
| Image Format | 16:9 |
| Effective Pixels | 1920 x 1080 |
| Scanning System | Progressive |
| Min. Illumination | 0 lux with LED |
| Day & Night | 24/7 Full-Color Day Mode |
| Day & Night Modes | 24/7 Full-Color Day Mode only |
| Compression | |
| Resolution | 2MP: 1920x1080 AHD/TVI/CVI CVBS: 700TVL |
| Frame Rate | 25/30FPS |
| Image | |
| Backlight Compensation | BLC/HLC |
| S/N Ratio | ≥52dB (AGC off) |
| Privacy Zone | no |
| Noise Reduction | 2D-DNR |
| Image Enhancement | Digital WDR, BLC, HLC |
| On Screen Data | |
| CoC Support | Yes |
| OSD Menu | Available via CoC only |
| Lens | |
| Field of View | 3.6mm Mega-Pixel Fixed (85°) |
| Iris | Fixed Iris |
| Lens Mount | M12 Mount |

| Connectivity | |
|--------------------|-----------------------------------|
| Video Output | 2MP AHD/TVI/CVI/CVBS + PAL/NTSC |
| Audio Connectivity | Built-in Microphone |
| Housing | |
| Illumination | 20m (2 High-Power White LED) |
| Bracket | 3-Axis Bracket |
| Protection Rate | IP67 |
| Dimensions | 172.2*73.4*74.5mm |
| Weight (gross) | ~480g |
| Power | DC12V/300mA |
| Work Environment | -30°C ~ 50°C , 10% ~ 90% humidity |

DIMENSIONS

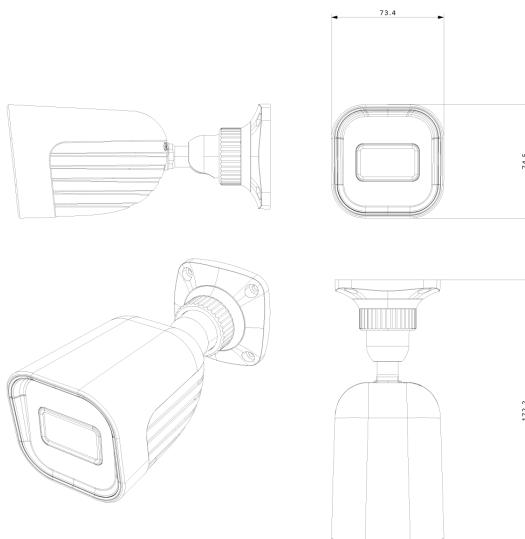

ACCESSORIES

