

HD PRO

Series marked for the installer looking for a high-level camera emphasizing the difference in image quality. The Pro series cameras are suitable for indoor and outdoor applications where professional video surveillance is required.


I2-380A-28

8MP Fixed Lens Small Bullet Camera With IR LED

This 4K bullet camera presents a stunning 8-megapixel image, equipped with a 2.8mm fixed lens, it is designed for short distance surveillance systems (up to 20m) for both indoor and outdoor scenarios. Featuring 4in1 technology selectable by a protected dipswitch the camera is ideal for Plug & Play over existing analog infrastructure.



8
MP

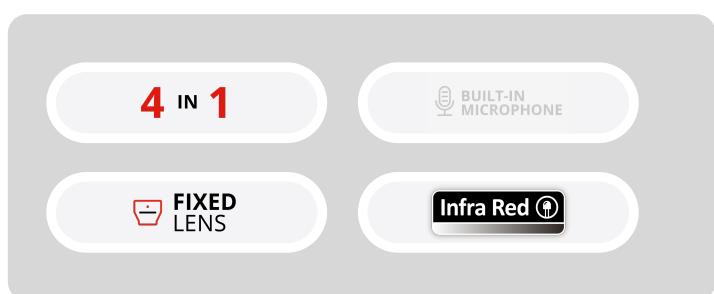

MAIN FEATURES

- I2-380A-28 8MP Fixed Lens Small Bullet Camera With IR LED
- Sensor: 1/2.5" 8MP CMOS Sensor
- Selectable Output: 8MP: 3840×2160 AHD/TVI/CVI 5MP: 2592×1944 AHD/TVI 4MP: 2560×1440 AHD/TVI/CVI CVBS: 700TVL
- Lens: 2.8mm Mega-Pixel Fixed (95°)
- True Day&Night-ICR
- 3D-DNR
- BLC
- Illumination: 20m (1 High-Power IR LED)
- IP67
- Weight: 475g
- Power: DC12V/340mA




<https://provision-isr.com>

SPECIFICATIONS

Video	
Image Sensor	1/2.5" 8MP CMOS Sensor
Image Format	8MP/4MP - 16:9, 5MP - 4:3
Effective Pixels	3864x2202
Scanning System	Progressive
Min. Illumination	Color : 0.01lux @F1.2, AGC ON B/W : 0lux with IR
Day & Night	True Day&Night-ICR
Day & Night Modes	Ext/Auto/Day/Night
Compression	
Resolution	8MP: 3840x2160 AHD/TVI/CVI 5MP: 2592x1944 AHD/TVI 4MP: 2560x1440 AHD/TVI/CVI CVBS: 700TVL
Frame Rate	8MP @ 12/15FPS, 5MP @ 20FPS, 4MP @ 25/30FPS, CVBS @ 25/30FPS
Image	
Backlight Compensation	BLC
S/N Ratio	≥52dB (AGC OFF)
Privacy Zone	no
Noise Reduction	3D-DNR
Image Enhancement	BLC
On Screen Data	
CoC Support	Yes
OSD Menu	Available via CoC Only
Lens	
Field of View	2.8mm Mega-Pixel Fixed (95°)
Iris	Fixed Iris
Lens Mount	M12 Mount

Connectivity	
Audio Connectivity	N/A
Housing	
Illumination	20m (1 High-Power IR LED)
Bracket	3-Axis Bracket
Protection Rate	IP67
Dimensions	172.2*73.4*74.5mm
Weight (gross)	475g
Power	DC12V/340mA
Work Environment	-30°C ~ 50°C , 10% ~ 90% humidity

DIMENSIONS

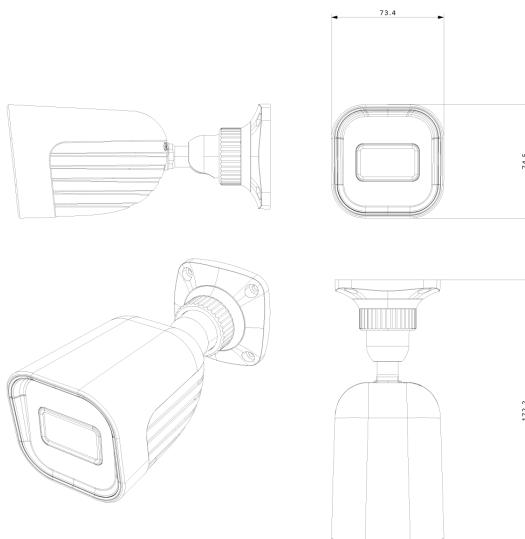

ACCESSORIES

