

# DH-PFM340-5CH CCTV Distributed Power Supply



#### **Features**

- 5 Channel security camera power supply distribution box with individual LED output indicator and metal case by lock key to prevent unauthorized access.
- Wide voltage input: AC90~264Vac, meet the requirements in different parts for electric network fluctuation.
- High quality and reliability: pass 100% quality examination and 3 months high temperature aging test.
- With overload protection, over-current protection, over-voltage protection, anti-static and anti-interference ability.
- Professional wall-mounted installation with reserved outlet holes, convenient and flexible.


### **Technical Specifications**

Model	DH-PFM340-5CH			
General				
Input voltage range	AC90~264V			
Outputs	5 x 12VDC (-3%~+7%) Outputs			
Max. output	4 A			
Output protection	5 replacement fuses, max. per output 2.5A			
Efficiency	84%			
No load power consumption	<0.5W			
Surge protected	Line to ground: 4000V			
	Line to line: 2000V			
ESD	Contact discharge: 6000V			
	Air discharge: 8000V			
Internal ON/OFF power switch	Yes			
Individual LED output indicator	Yes			
Dimension	165mmx165mmx50mm(6.5"x6.5"x1.97")			
Weight	0.85kg(1.87lb)			
Color	White			
Installation mode	Wall-mounted			
Operating temperature	-20°C ~ +45°C (-4°F ~ +113°F)			
Operating humidity	<90% RH			
Certification	CE/FCC			

## **Order Information**

Туре	Part Number	Description
Power	DH-PFM340-5CH	CCTV distributed power supply
		_Dahua brand, 5x0.8A, DC12V
	DH-PFM341-9CH	CCTV distributed power supply
		_Dahua brand, 9x0.55A, DC12V

#### **Dimensions (mm/inch)**

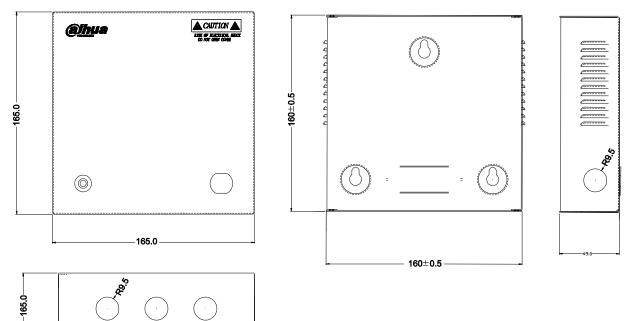

#### **Package Information**

• CCTV distributed power supply box DH-PFM340-5CH \*1

-160±0.5

- Mounting sticker \*1
- Fuse \*2
- Key \*2
- St4 screw \*3
- Plastic anchor \*3

Package data		
Box Dimension 178mmx178mmx63mm (7.01"x7.01"x2.48")		
Box Weight	0.95kg (2.09lb)	
Protective Box Dimension	620mmx392mmx205mm (24.41"x15.43"x8.07")	
Box In Protective Box	14 In 1	

